


Natty Top

Natty: adjective \ˈnɑ-tē\ neatly or trimly smart in dress or appearance.

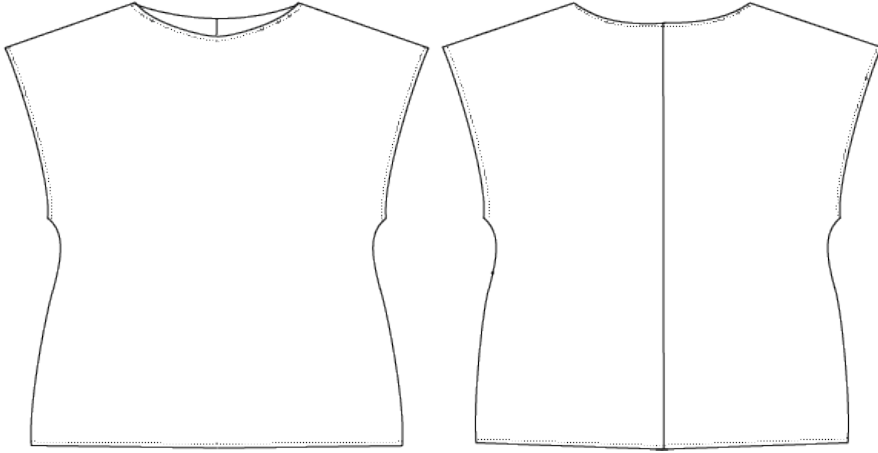

The Natty top is a quick top to sew up. It fits comfortably through the bust, nipping in at the waist, and flattering the hips. It is great for beginners, as well as, advance sewers. There are an abundance of ways you can alter it to make a whole new look.

This is truly a 1 hour or less top.

SIZE CHART

	XXS	XS	S	M	L	XL
BUST	30	33	35	37	38	40
WAIST	24	25	28	30	32	36
HIP	32	36	38	40	42	46

FINISHED MEASUREMENTS

	XXS	XS	S	M	L	XL
BUST	32	35	37	39	40	42
WAIST	28	30	32	34	36	40
HIP	34	38	40	42	44	48

Fabric :

1 yard 60 wide
Interlock, Ponte de
Roma or Mid weight
Jersey*(7oz or higher).

Please do not use rib knit.

Supplies/Tools:

Matching Tread
Knit needle
Double needle
Shears
Pins

Seam allowance:

$\frac{1}{2}$ inch

Machine settings:

Zigzag

1 width

2 length

Double Needle


0 width

4 length

*when sewing lighter weight jersey adjust hem at neck and shoulders to $\frac{1}{4}$ inch.


Natty Top Instructions

Pattern Prep and Cutting

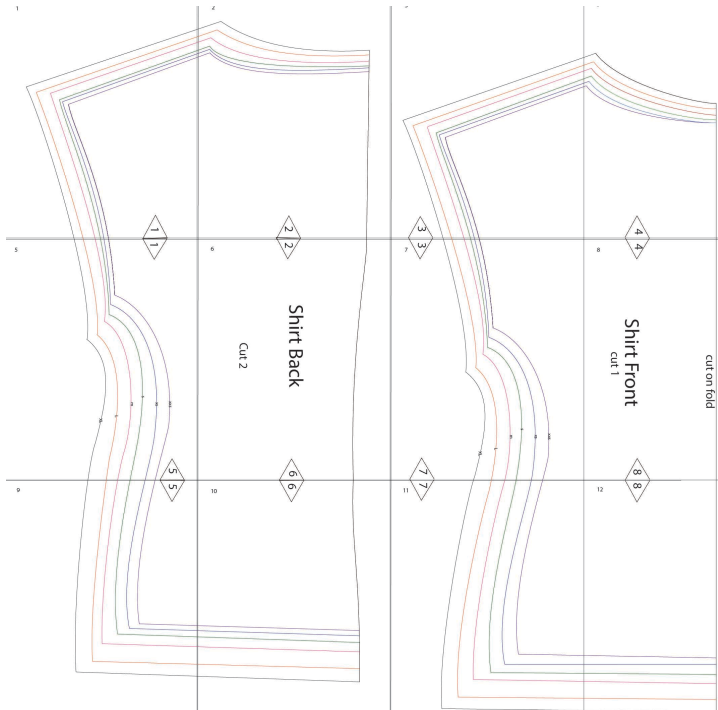

Getting your PDF pattern ready
Your pattern will print on 8 ½ x 11 sheets. You will put your pattern together using the numbered guides and lines. You may want to trim the extra paper away. Line up the sheets and tape them together like the image to the left.

Tracing or Pinning Pattern
You can trace your selected size from the pieced PDF pattern onto larger paper. You can use tissue paper, craft paper, or freezer paper. You can also cut the pieced PDF to your size and use it as your pattern.

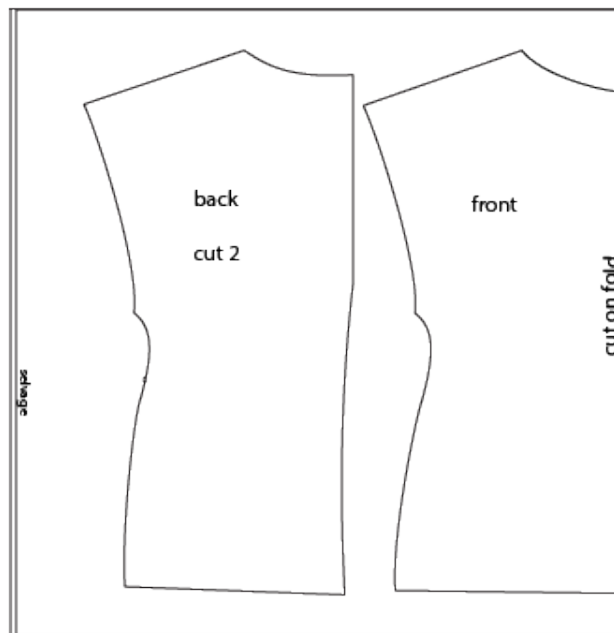


The Natty Top is cut on the fold with right sides together.

This pattern is for home use only.

Step 1:

Sewing Machine: Stitch the back seam with right sides together. Start stitching from the neck of the shirt to the bottom.

Serger: Serge back seam with right sides together from neck to bottom.

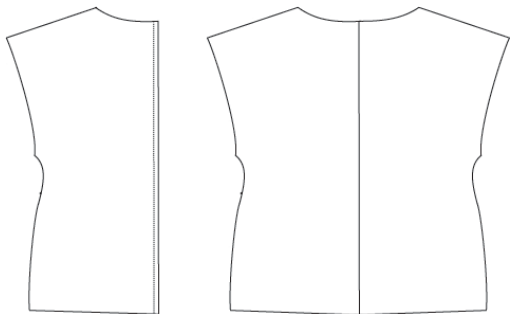

Step 2:

Sewing machine: Pin and sew shoulder seams. Press seams flat. Stitch from neck out.


Serger: Serge shoulder seams from neck out.



Step 3:

Sewing machine: Pin together side seams. Sew from arm opening down. Press seam open.

Serger: Serge together side seams from arm opening down.



Step 4:

Sewing Machine: Press under bottom hem 1/2 inch and topstitch with double needle.


Serger: Serge bottom edge just to finish edge. Then follow sewing machine instructions for Step 4.



Step 5:

Sewing Machine: Press under bottom 1/2 inch on each sleeve and topstitch with double needle.


Serger: Serge sleeve edge just to finish edge. Then follow sewing machine instructions for step 5.



Step 6:


Sewing Machine: Press under neckline 1/2 inch and topstitch with double needle.

Serger: Serge around neck edge just to finish edge. Then follow sewing machine instructions for step 6.





Voila! You have a great little top.


1

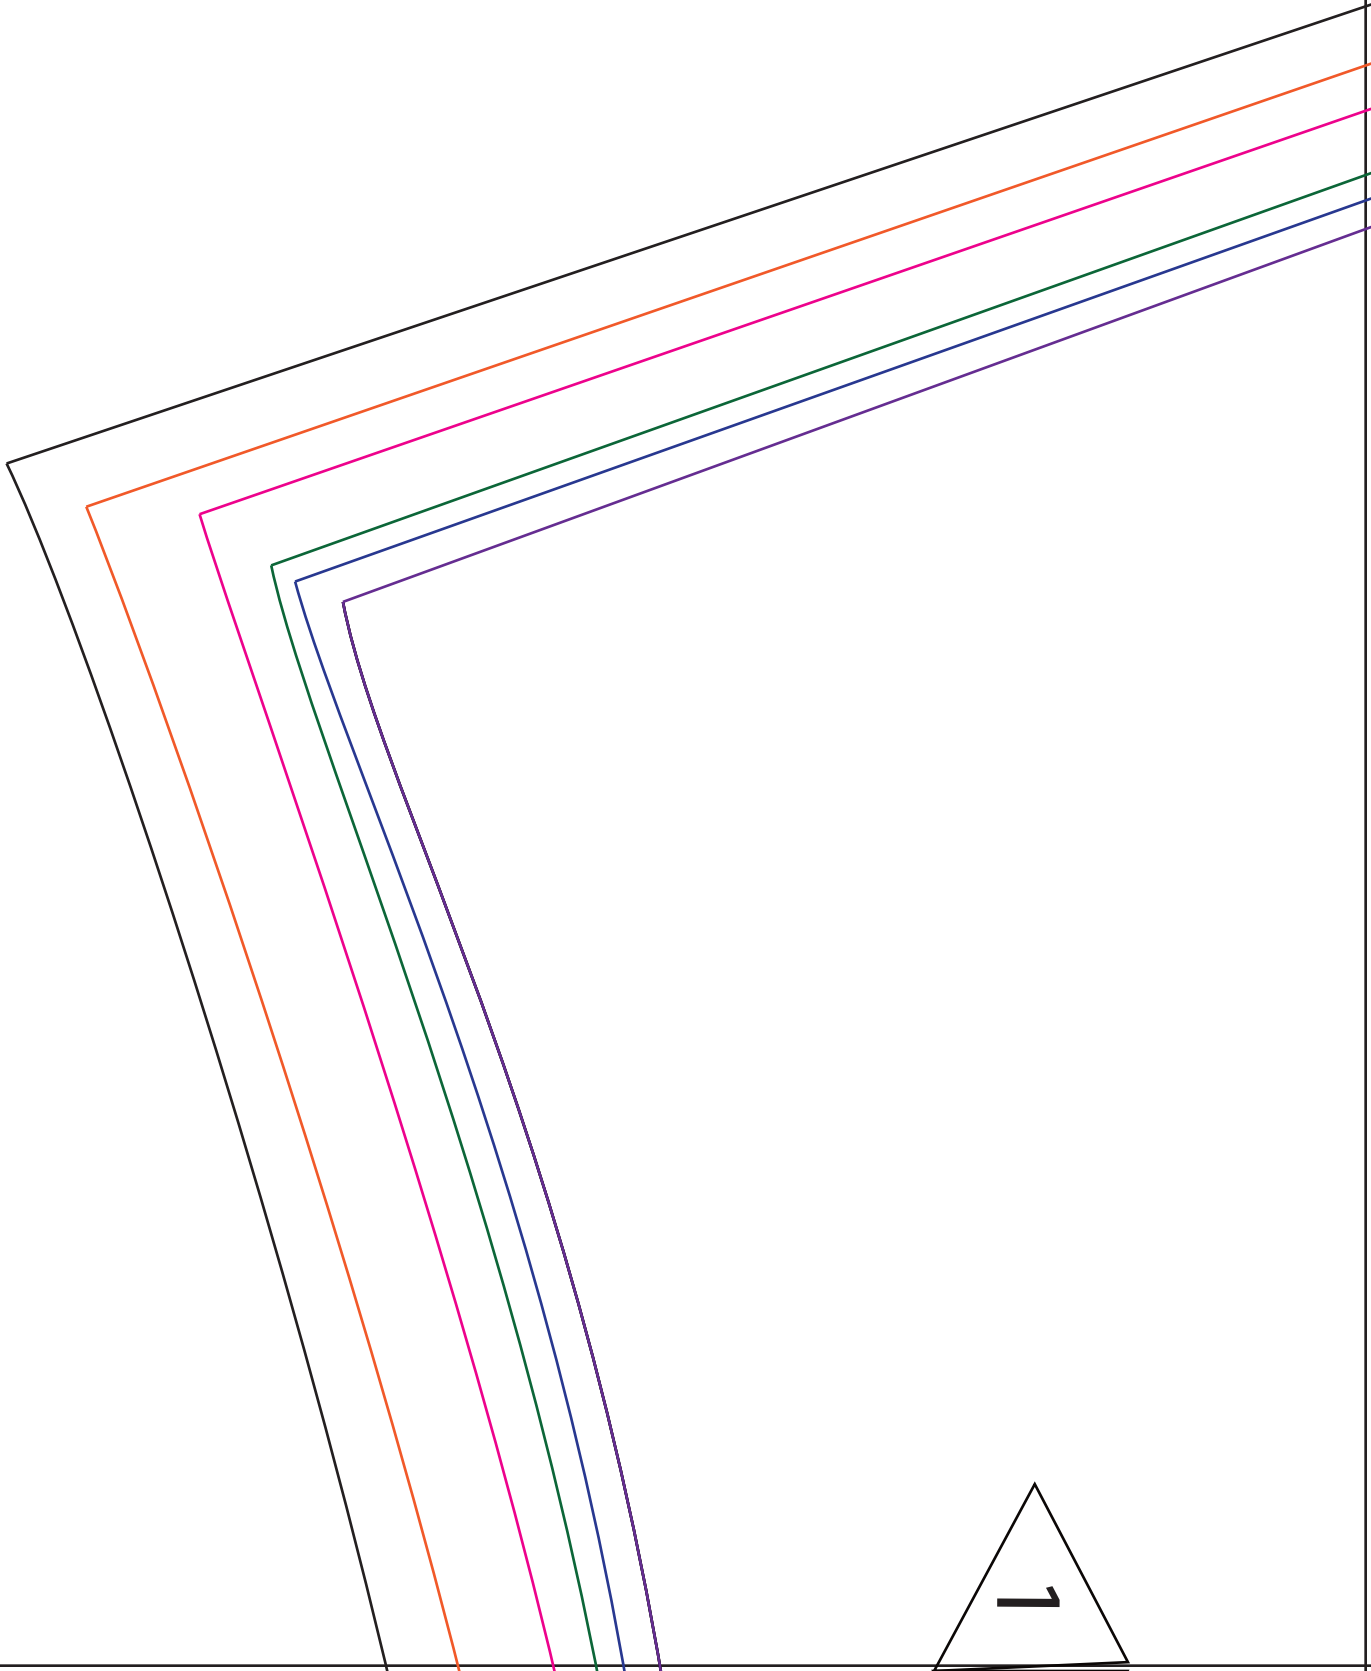

2


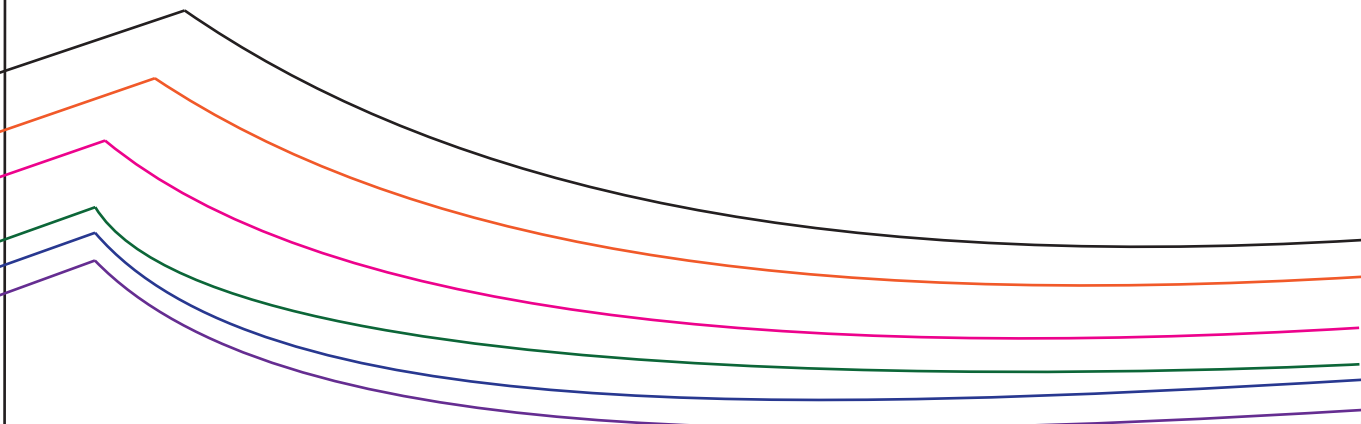


3

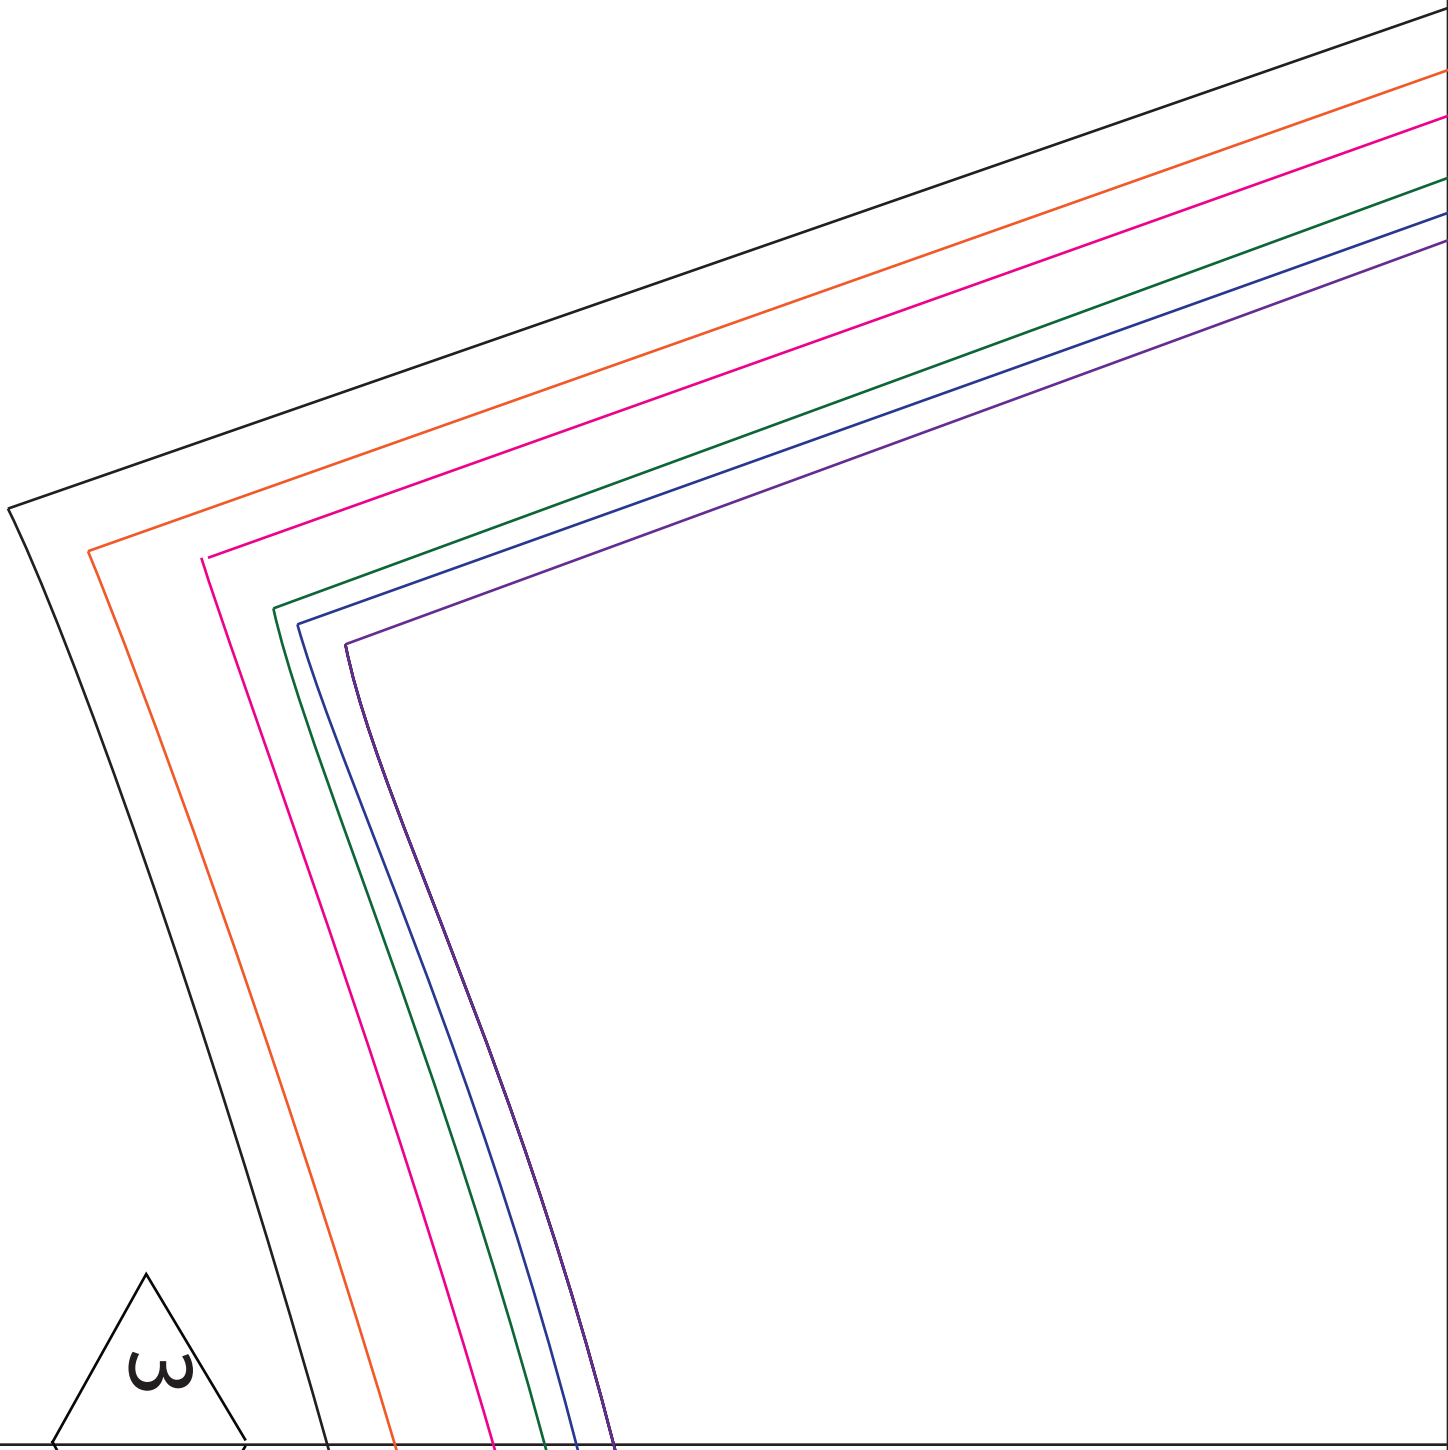

3

4

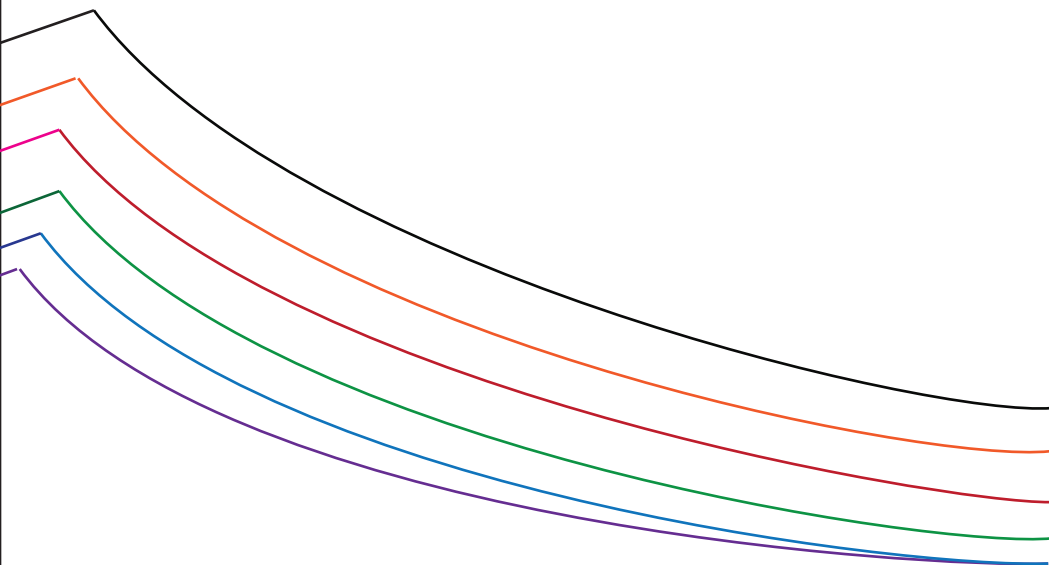

4

1

5

XXS

XS


S

M

L

XL

5

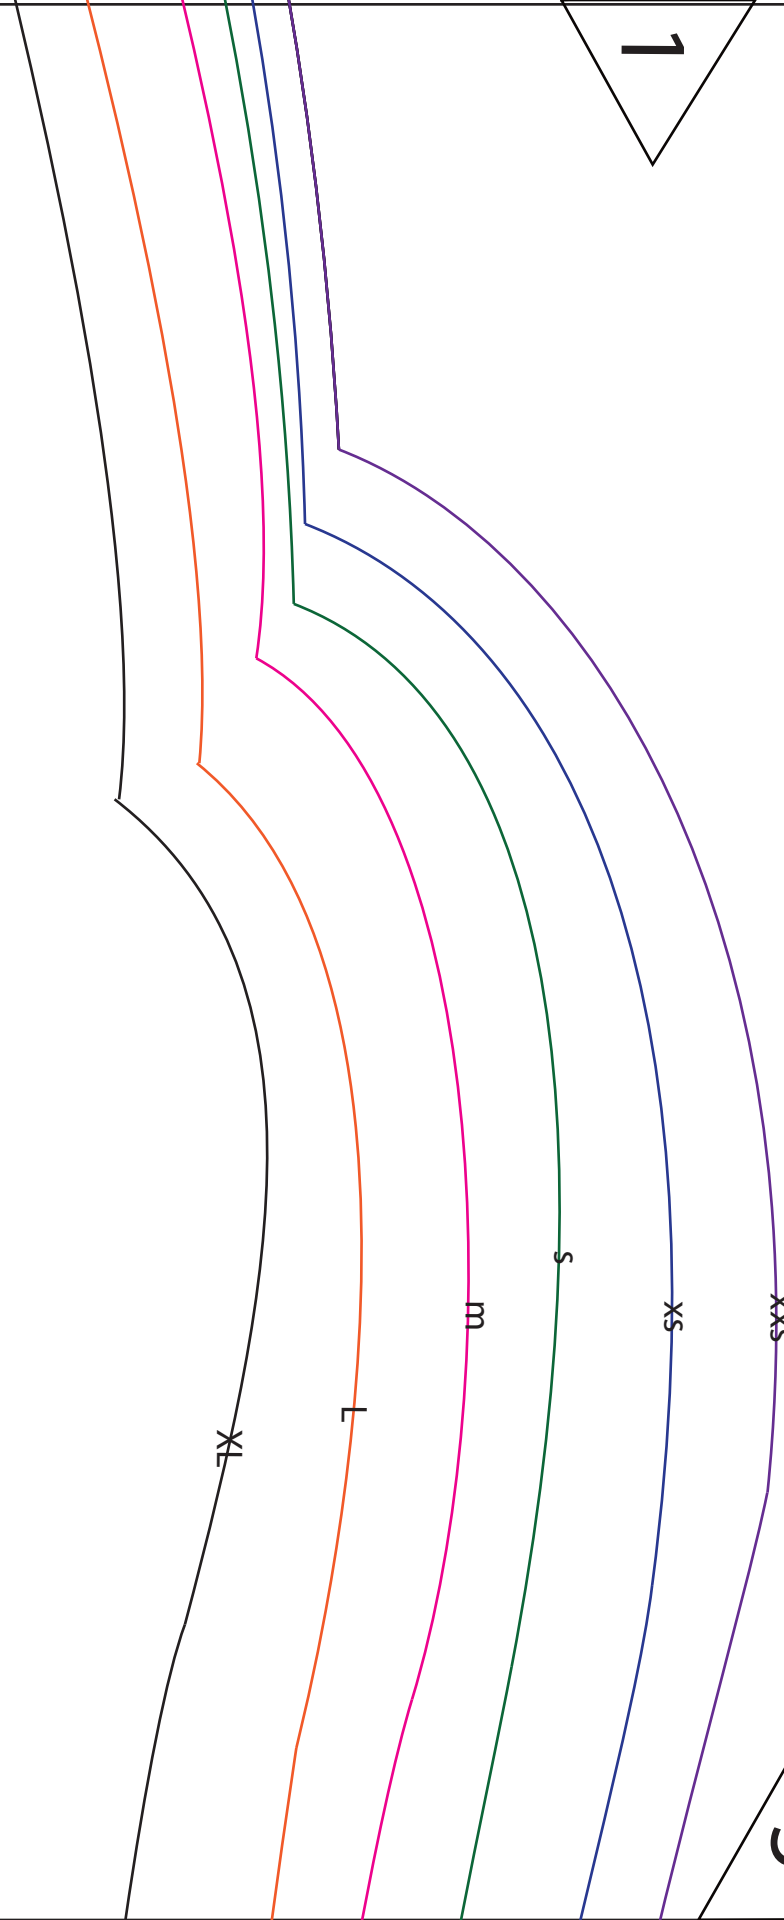

Shirt Back

Cut 2

2

6

7

3

7

XL


L

M

S

XS

XXS

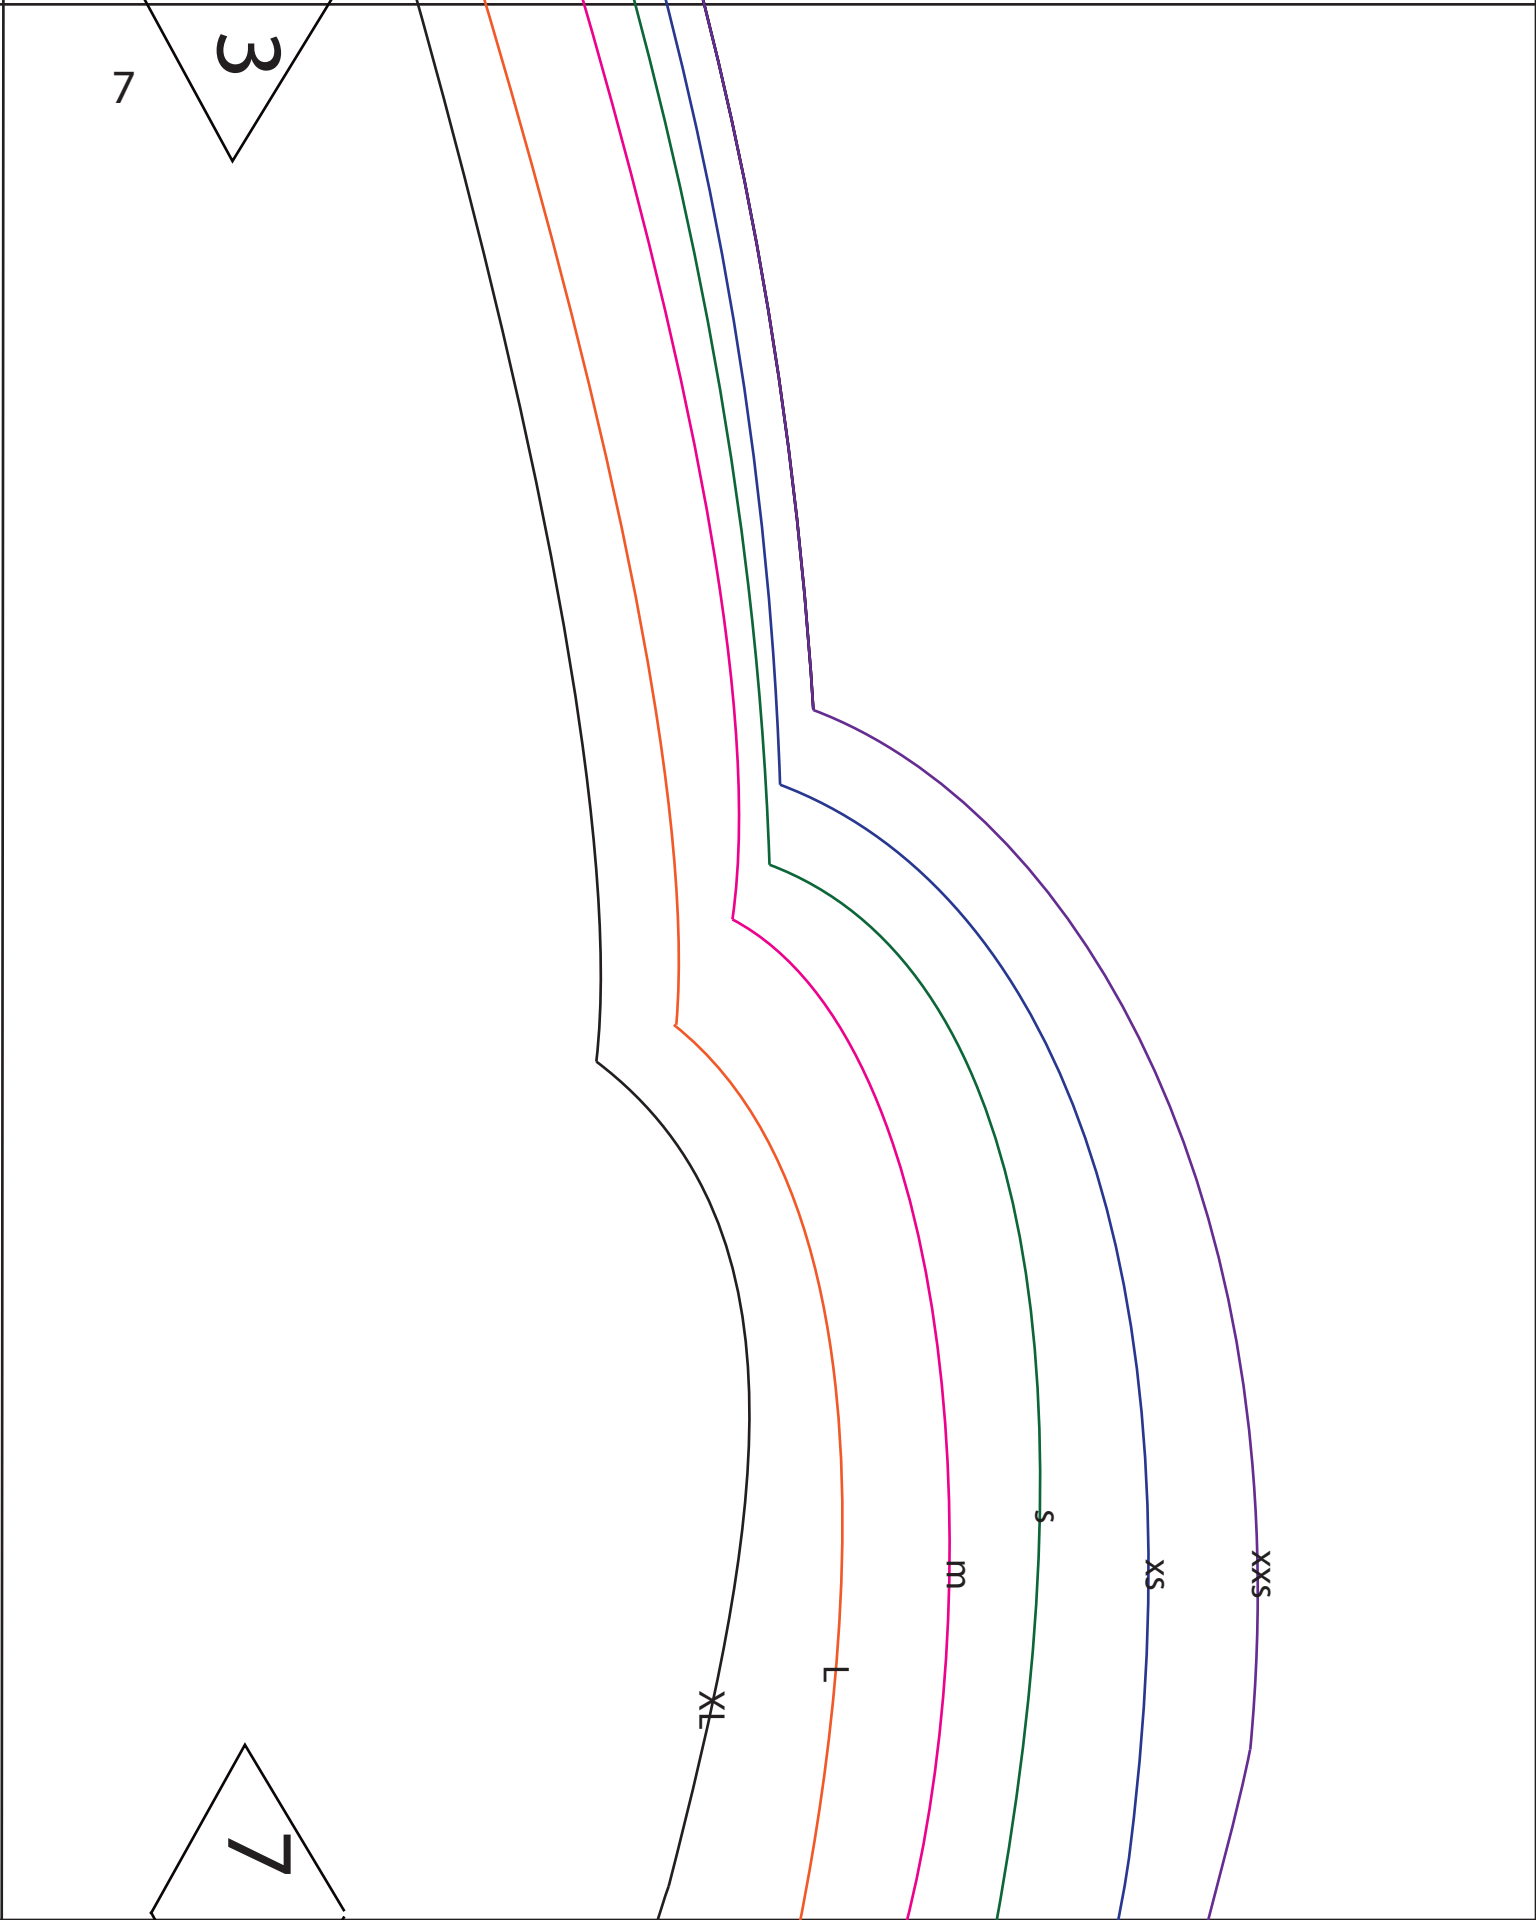

cut on fold


Shirt Front


cut 1


4

8

8

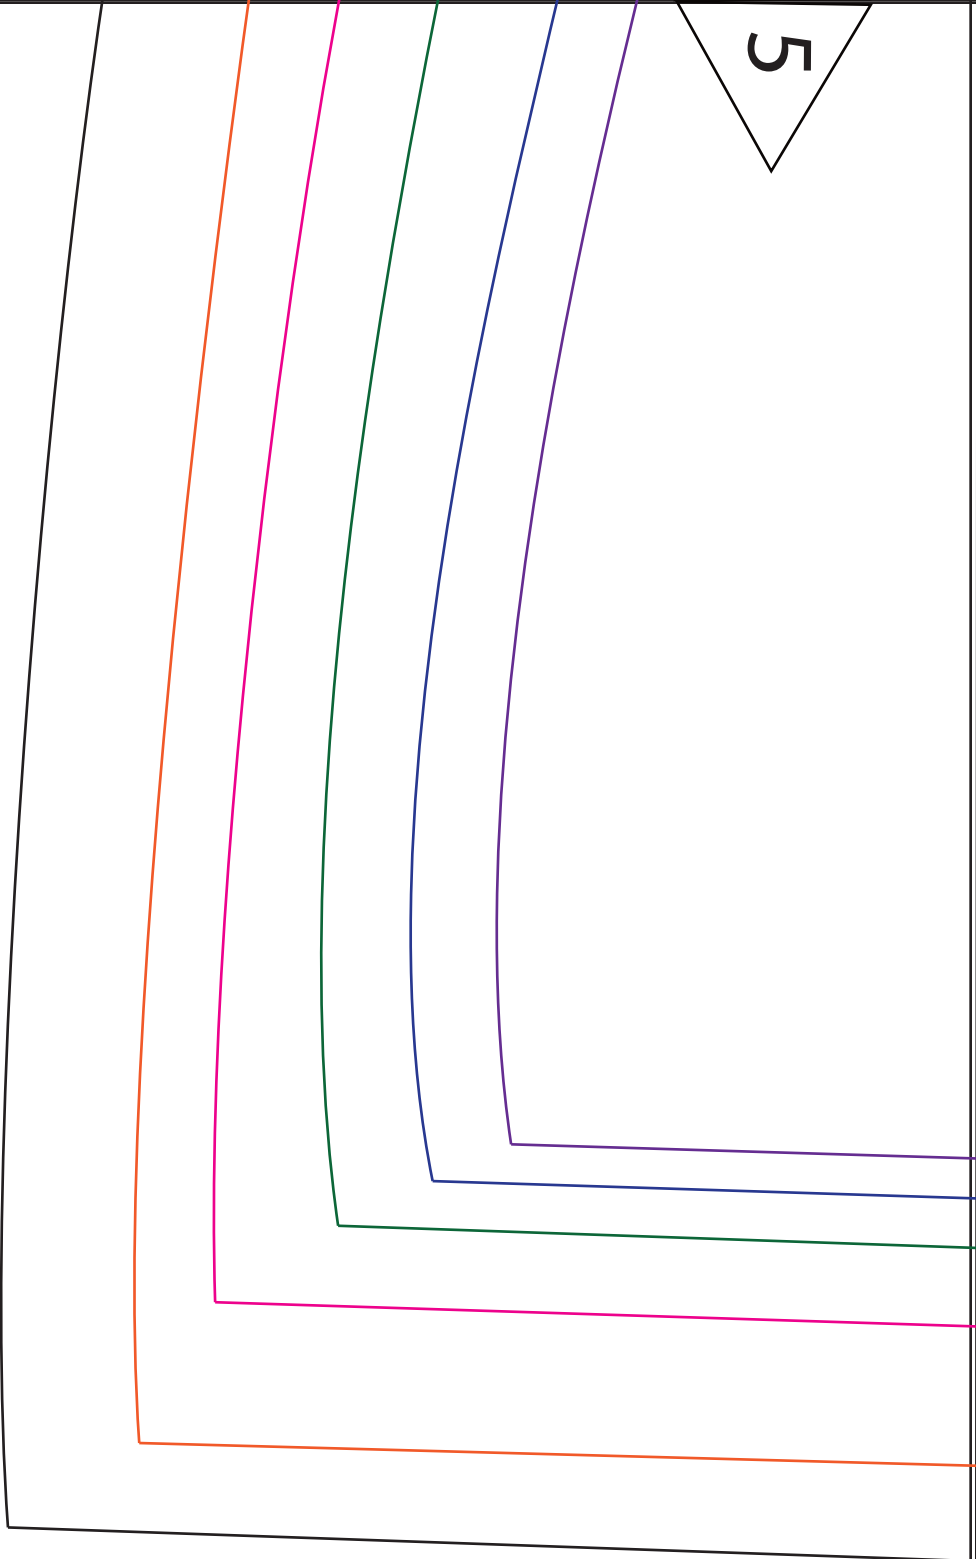

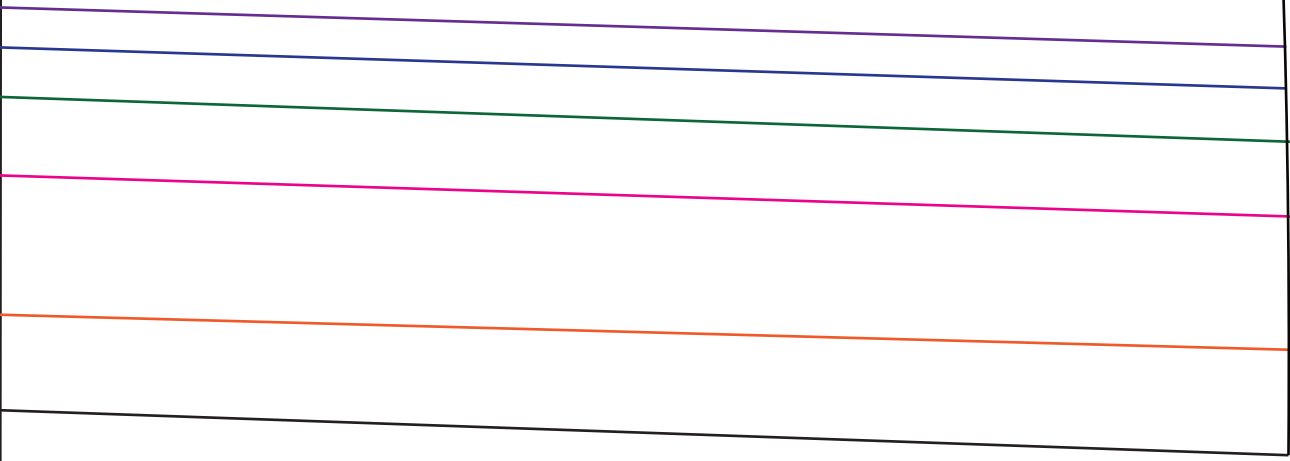

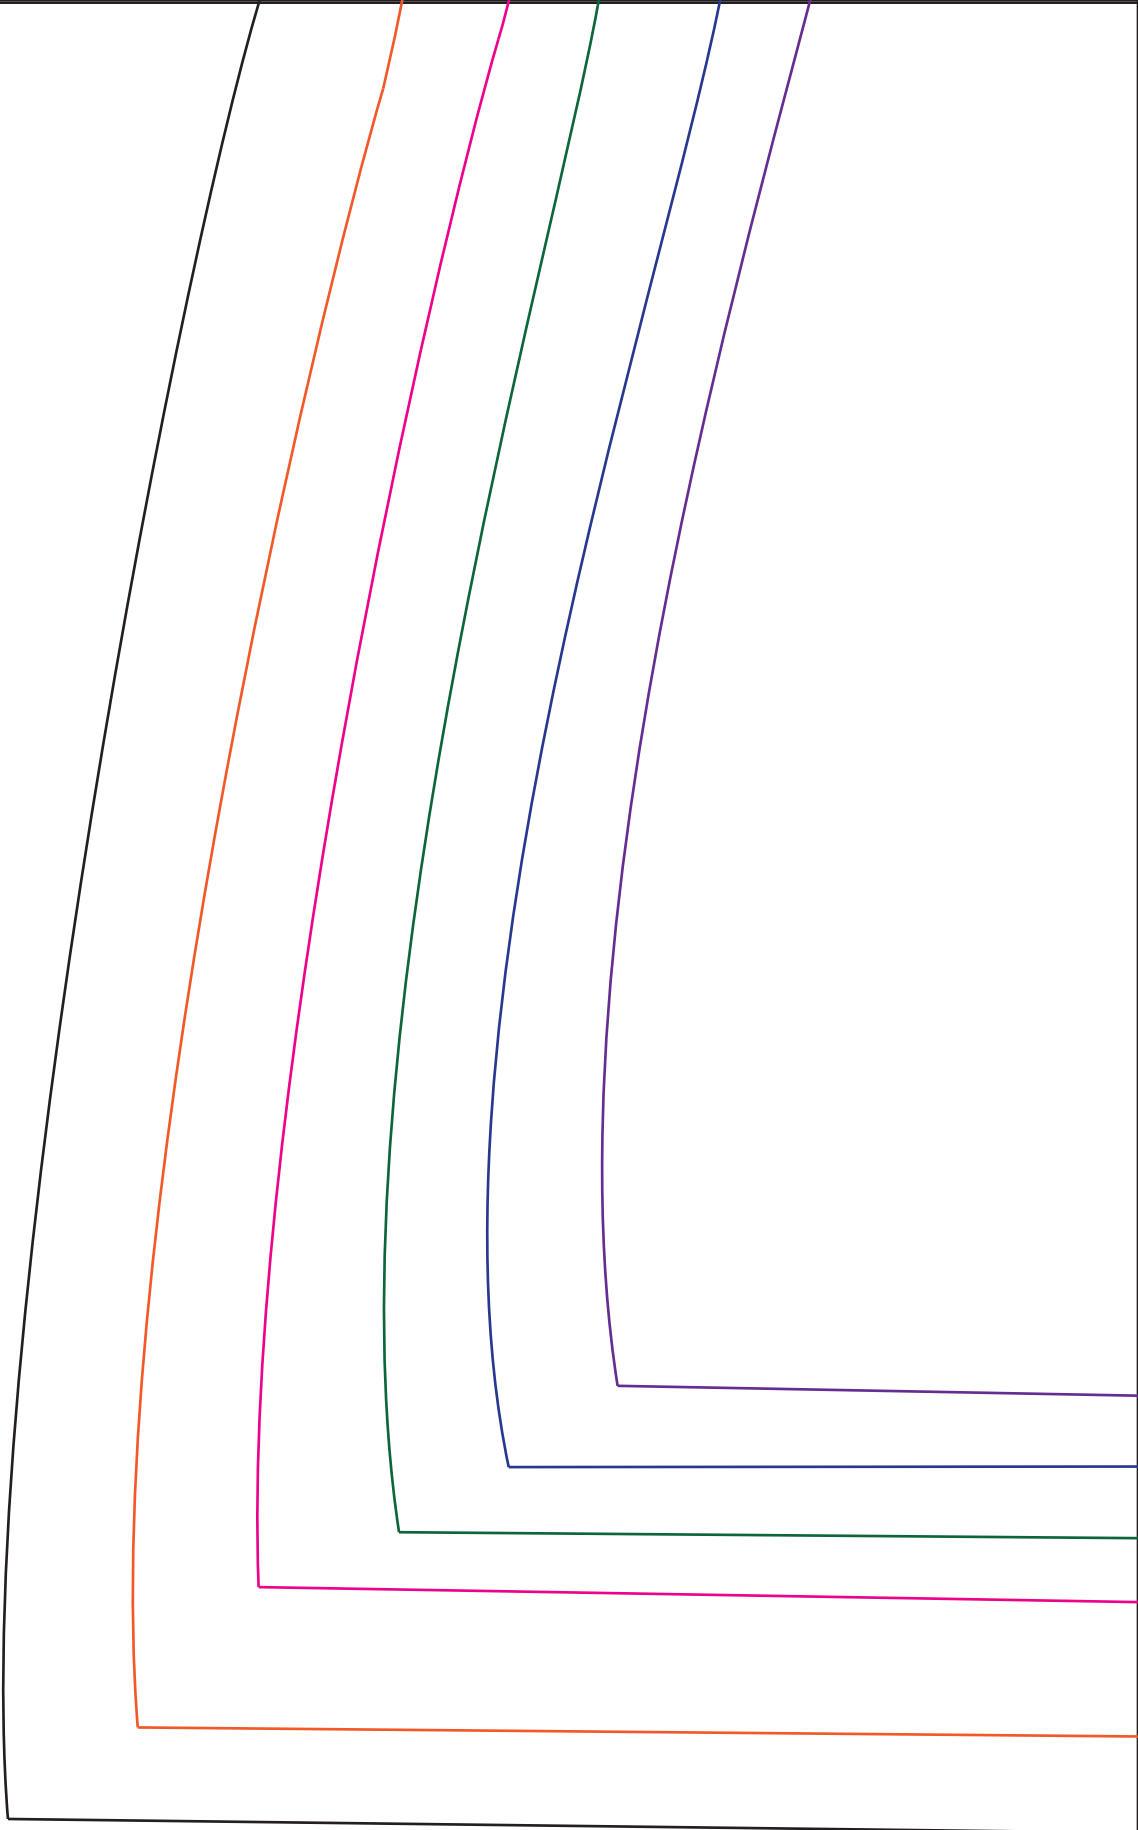

12

∞

